



**COMPOR**

# FIBERGLASS COMPOSITE

SIA "COMPOR" LLC, SALASPILS, LATVIA

☎ +371 27822444, +371 29417038

✉ [info@compor.lv](mailto:info@compor.lv)

🌐 [www.compor.lv](http://www.compor.lv)



# TABLE OF CONTENTS

Technical Certificate_____	3
Profiles _____	4
Pultrusion _____	8
Properties of Materials_____	9
Window Installation System_____	10
Solar Cell Structures _____	11
Cable Channels and Consoles _____	12
Fish Farming, Industrial Farming_____	13
Bridge Structures _____	14
Noise Barrier_____	15
Hangar Structures _____	16
Foundation System _____	17
Modular Houses _____	18
References_____	19

**COMPOR**

# FIBERGLASS COMPOSITE

## TECHNICAL CERTIFICATE

### Application

Profiles made of fiberglass composite material, which are produced by pultrusion process, are used in various constructions (stairs, covers, squares, overpasses, technical buildings energy structures, etc.)

### Material Properties

- Four times lighter than metal
- Does not corrode
- Durable in aggressive environments
- Not exposed to UV radiation
- Long service life
- Dielectric with antistatic properties
- Easy to install


Complies with EN 13706 and LVN UTN 0103 90 490-01-2016 Technical Regulations

Characteristics	Compliance with	Notes
Chemical resistance	ISO 175, 4892	-
UV resistance	EN ISO 4892-3:2006	-
Mechanical strength	LVS EN ISO 527	Tensile strength limit 205.7-488.4 MPa Tensile strength limit (CW) 51.6 MPa Elastic modulus 18.5-30.1 GPa
Fire resistance and reaction to fire	LVS 263-2000 EN 13501	B s1 d0 un C s2 d0
Density	-	1.66 – 1.93
Glass amount in the mass	-	65-75%
Resin amount in the mass	-	25-35%
<b>Electrical Properties</b>	-	-
Electrical resistance (longitudinal LW)	IEC 60234	Up to 1.58 kV/mm
Electrical resistance (perpendicular CW)	IEC 60234	Up to 7.9 kV/mm
Resistance circuit (indicates the measurement value in the transverse direction)	-	120 seconds
Dielectric constant 60 Hz (perpendicular)	-	5.2
<b>Shelf Life</b>	-	Unlimited

**COMPOR**


# FIBERGLASS COMPOSITE PROFILES

## Angle




Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Height	Width	Thickness						
h - mm	b - mm	t - mm						
25	25	3.2	0.27	143.70	8,552	19.0	280.0	250.0
40	40	3.2	0.41	236.50	36,503	19.0	285.0	254.0
51	51	3.2	0.51	305.20	77,229	19.0	288.0	259.0
51	51	6.4	0.96	594.10	140,341	21.8	348.4	288.8
60	60	4	0.81	456.40	159,903	26.0	289.0	263.0
76	76	6.4	1.67	916.70	508,159	21.8	348.0	289.0
76	76	9.5	2.43	1,345.90	714,920	26.1	488.4	414.3
120	30	3,2	0,78	459,20	676162	19,0	285,0	254,0

## U-profile Beam




Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Height	Width	Thickness						
h - mm	b - mm	t - mm						
75	25	5	0.97	547.90	38,5768	27.00	350	310
100	40	5	1.41	822.90	1,142,953	27.00	350	310
150	50	4	1.68	948.50	2,979,981	26.00	289.3	263.2
150	50	6	2.46	1,392.30	4,233,805	23.20	430	479
200	60	8	4.30	2,377.30	12,480,541	25.00	430	479
200	80	8	4,72	2697,30	15431368	25,00	430	479

## Double Beam



Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Height	Width	Thickness						
h - mm	b - mm	t - mm						
102	51	6.4	2.19	1,210.80	1,836,461	23.20	429.2	478.3
150	150	10	7.83	4,369.70	16,810,802	30.10	320	305
200	200	10	10.3	5,870.50	41,511,065	30.10	320	305

## Corrugated Tube




Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Outer Diameter	Inner Diameter	Thickness						
D - mm	d - mm	t - mm						
34	25	4.5	0.64	365.00	39,641	19.0	288.0	259.0

**COMPOR**


# FIBERGLASS COMPOSITE PROFILES

## Round Pipe




Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Outer Diameter	Inner Diameter	Thickness						
D - mm	d - mm	t - mm						
31	25	3	0.47	257.20	2,4845	19.0	288.0	259.0
38	32	3	0.62	290.10	4,4607	19.0	288.0	259.0

## Concrete Interconnection Dowels




Diameter	Area, mm <sup>2</sup>	Weight, kg/m
20	314	0.59
25	491	0.92
30	707	1.32

## Square Tube



Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Height	Width	Thickness						
h - mm	h - mm	t - mm						
25	25	3.2	0.52	274.10	22,480	19.0	288.0	259.0
37	37	2.8	0.66	377.90	74,376	18.50	275	250
44	44	2.8	0.79	447.00	123,262	18.80	275	250
44	44	6	1.57	894.20	214,853	23.20	429.2	478.3
51	51	3.2	1.17	592.20	221,782	19.0	288.0	259.0
51	51	6.4	2.03	1,115.50	371,141	23.20	429.2	478.3
60	60	4.5	1.79	990.50	508,813	26.00	289.3	263.2
101	101	3.8	2.61	1507.10	2411802	21.30	331.3	205.7



## Lattice Deck

Possible Grating Heights, mm

30

38

50

Possible Cell Sizes, mm: 19 x 19, 38 x 38

## Plate




Profile Size, mm		Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B- base)	Bending Strength, MPa (B- base)
Width	Thickness						
B - mm	t - mm						
400	10	5.44	4,000.0	53,333,333	30.1	320.0	305.0

**COMPOR**

# FIBERGLASS COMPOSITE PROFILES


## Handle

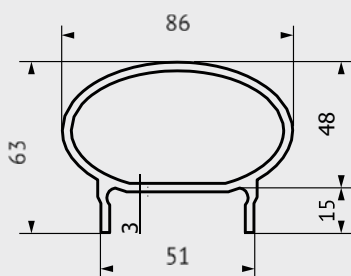

Profile Size, mm					
Height	Width	Mounting Height	Inner Mounting Width	Outer Mounting Width	Thickness
H - mm	B - mm	h - mm	b - mm	c - mm	t - mm
63	86	15	51	57	3

Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, I <sub>x</sub> mm <sup>4</sup>	Moment of Inertia, I <sub>y</sub> mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B-base)	Bending Strength, MPa (B-base)
0,95	1175	437400	865330c	19,0	285,0	254,0

## Lower Guard Rail



Profile Size, mm			
Height	Width	Mounting Height	Thickness
H - mm	B - mm	h - mm	t - mm
140	30	41	3

Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, I <sub>x</sub> mm <sup>4</sup>	Moment of Inertia, I <sub>y</sub> mm <sup>4</sup>	Elastic Modulus, GPa (B-base)	Tensile Strength, MPa (B-base)	Bending Strength, MPa (B-base)
1.03	796.94	1,190,900	38,721	19.0	285.0	254.0

## Solid Deck



Profile Size, mm			Weight, kg/m	Area, mm <sup>2</sup>	Moment of Inertia, I <sub>x</sub> mm <sup>4</sup>	Moment of Inertia, I <sub>y</sub> mm <sup>4</sup>	Elastic Modulus, GPa (B-baze)	Tensile Strength, MPa (B-base)	Bending Strength, MPa (B-base)
Height	Width	Thickness							
B - mm	h - mm	t - mm							
509 500*	38	Surface – 6 Legs – 4	8.0	4,770.3	855,250	109,520,000	18.7	260	241

\* Operating Width

## Siding (Finishing Panel)




Area, mm <sup>2</sup>	Moment of Inertia, I <sub>x</sub> mm <sup>4</sup>	Moment of Inertia, I <sub>y</sub> mm <sup>4</sup>
949,1	5954,3	6264300



**COMPOR**

# FIBERGLASS COMPOSITE PROFILES


## Corrugated Walls

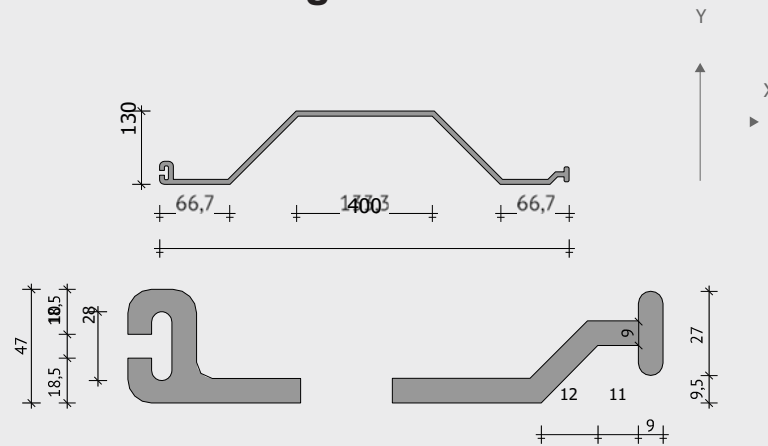


Thickness, mm	Area	Perimeter	Centre of Mass		Tensile Strength	Bending Modulus	Impact Resistance
5	3,871	1100	X: 20.00	Y: 5.95	488.4 MPa	26.1 GPa	at T 20°C – 80 kJ/m
							at T 0°C – 110 kJ/m

Thickness, mm	Area	Perimeter	Centre of Mass		Tensile Strength	Bending Modulus	Impact Resistance
9.5	6,126	2,750	X: 50.02	Y: 5.92	488.4 MPa	26.1 GPa	at T 20°C – 287 kJ/m
							at T 0°C – 313 kJ/m

Moment of Inertia (1 m)							
$W_x = 3,468.62 / (0.9 + 5.92) = 508.6 \text{ cm}^3$							
$W_y = 103,738.04 / 50.02 = 2,073.9 \text{ cm}^3$							

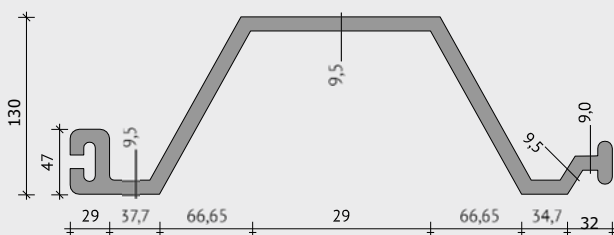

Thickness, mm	Area, mm <sup>2</sup>	Moment of Inertia, I <sub>x</sub> mm <sup>4</sup>	Moment of Inertia, I <sub>y</sub> mm <sup>4</sup>
9.5	6,126	13,169,000	97,369,000

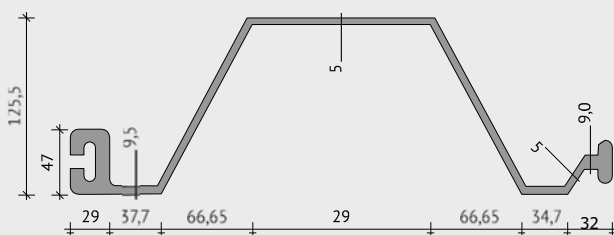

Thickness, mm	Area, mm <sup>2</sup>	Moment of Inertia, I <sub>x</sub> mm <sup>4</sup>	Moment of Inertia, I <sub>y</sub> mm <sup>4</sup>
5	3,870.5	7,506,400	71,316,000





**COMPOR**

# FIBERGLASS COMPOSITE PULTRUSION

## How it Works

Pultrusion is a continuous technological process when completely formed fiberglass composite profiles with the initially set configuration are made by pulling glass materials impregnated with thermosetting resins through a heated filler casting mould.


A controllable thermosetting resin polymerisation process is provided in the filler. The end products contain 45 to 75 percent fiberglass filler.

The finished profile does not require additional processing. The length of the product is not limited and is usually determined by the customer's needs and transport options.



## Process Benefits

This process provides maximum flexibility in profile design selection. The composite can be assigned certain strength parameters (for example: fire resistance, various physical and mechanical properties, dielectric properties and others). The colour of the profile is uniform along the entire length of the cross-section. Colour is selected according to the RAL Catalogue.

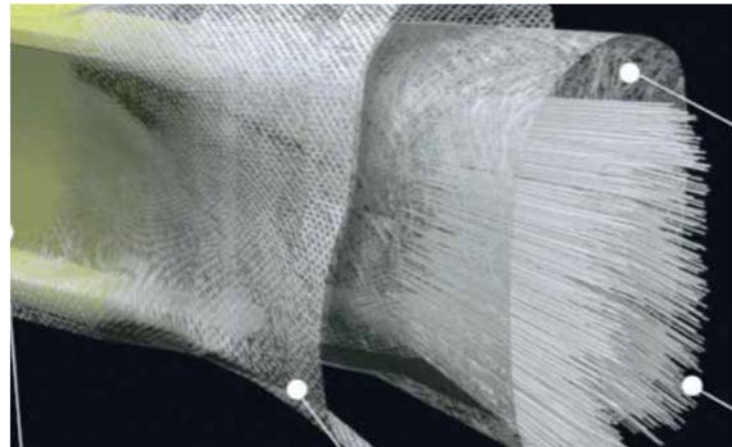

## 75% lighter than metal!

Fast  
assembly



Highly resistant  
corrosion



Light  
weight



Resistant to aggressive  
environments and  
chemicals



Not exposed to  
UV radiation



Low  
maintenance  
costs







**COMPOR**

# FIBERGLASS COMPOSITE

## PROPERTIES OF MATERIALS

Properties	Fiberglass Composite	PVC	Steel	Aluminum
Density, kg/m	1.6-2.0	1.4	7.8	2.7
Destructive Compressive (Tensile) Stress, MPa	220	41-48	235-480	180-210
Destructive Bending Stress, MPa	220	80-110	400	275
Elastic Modulus, GPa	21	2.8	210	70
Coefficient of Linear Expansion, $\times 10^{\circ}\text{C}$	8	57-75	11-14	22
Thermal Conductivity Coefficient, $\text{Wt/m}^{\circ}\text{K}$	0.25-0.33	0.3	50	230
Corrosion Resistance	Very good	Good	Poor	Average



# FIBERGLASS COMPOSITE WINDOW INSTALLATION SYSTEM

The installation system ensures the exact placement of windows and doorways, and also the acceptance of all permanent and variable loads.

The system is adjustable in three dimensions, easily compensating for structural installation tolerances. Mounting bracket size: up to 150 mm, which can be positioned according to the optimal isothermal profile.



## An advantageous solution

- + Easily adjustable in three dimensions
- + Easily compensated installation tolerances
- + Simple, quick and safe installation even of large (and heavy) windows and doors
- + Individually adjustable sizes
- + Increased load carrying capacity without using expensive additional support elements
- + A durable structure eliminating installation problems



## The highest quality

- + Calculated load carrying capacity and safety statics (see data sheet)
- + Predictably safe window installation
- + Suitable for all workloads
- + A comprehensive system from one manufacturer
- + Easy and safe installation according to RAL Regulations / ift Rosenheim (Germany)



## Structural physics

- + Low temperature resistant material
- + The sealing process is not delayed
- + Sufficient space for insulation and sealing material



**COMPOR**

# FIBERGLASS COMPOSITE SOLAR CELL STRUCTURES

We offer solutions using environmentally friendly materials and allowing the use of solar panels in combination with various types of structures.

Light weight

Minimum roof load

Fastening to the roof without drilling

Resistant to corrosion

Not affected by temperature fluctuations

Resistant to UV effect







**COMPOR**

# FIBERGLASS COMPOSITE CABLE CHANNELS AND CONSOLES

Light weight

Non-conductive

Resistant to corrosion



Chemically resistant



Impact-resistant



Long service life

Low maintenance costs



**Shelf  
Width:**

235 mm

**Overall  
width:**

265 mm

**Weight:**

1 kg/m

**Price of 9 to 32 EUR/m**

Dimensions according to the customer's  
order!

## Console



**Size:**

250 mm x 350 mm

**Price:**

9.50 EUR/pc.



**Size:**

200 mm x 350 mm

**Price:**

7.50 EUR/pc.



**COMPOR**

# FIBERGLASS COMPOSITE

## FISH FARMING, INDUSTRIAL FARMING

We offer service platforms and stairs, in any configurations, according to the project.

Light weight

Resistance to moisture,  
UV and aggressive  
environment effects

Resistant to corrosion

Environmentally-friendly materials

Fast installation



# FIBERGLASS COMPOSITE BRIDGE STRUCTURES

We offer construction of pedestrian bridges, suspension bridges, footbridges and stairs. These structures are characterised by a solid deck and anti-slip coating.



Light weight



Resistant to corrosion



Resistance to moisture, UV and aggressive environment effects



Wear-resistant anti-slip coating (corundum base)



Fast installation



Low maintenance costs



Distance between supports, m	0.50	0.75	1.00	1.25	1.50	1.75	2.00
Max. load kg/m2, Deflection L/150	15 950	4 730	2 000	1 020	590	370	250
Max. load kg/m2, Deflection L/200	11 960	3 535	1 500	765	440	275	185
Max. load kg/m2, Deflection L/400	5 960	1 770	750	380	220	135	90



**COMPOR**

# FIBERGLASS COMPOSITE NOISE BARRIER

pFast installation

Light weight

Thermally and electrically non-

conductive

Resistant to corrosion



Impact resistant

Dimensional stability



## Price from 50 EUR/m

which may change depending on the technical details of the project

Low maintenance costs

Structures	Rw – Insulation Index	$\alpha_s$ – Sound Absorption Coefficient
1. Screen made of fiberglass composite material	dB	-
1.1. Thickness 100 mm	37	0.8
1.2. Thickness 150 mm	38	0.8
2. Impact resistant glass (thickness 13 mm)	37	0.2
3. Screen made of fiberglass composite material + impact resistant glass	-	-
3.1. 100 mm +13.5 mm	37	0.2 - 0.8
3.2. 150 mm +13.5 mm	37-39	0.2 - 0.8
4. Fiberglass composite pole	-	-
4.1. I 150 x 150 x 10 mm	39	0.8
4.2. I 200 x 200 x 10 mm	39	0.8



AIR SOUND DAMPING DLR(dB) – **up to 39**

SOUND ABSORPTION DI $\alpha$ (dB) – **up to 13**





**COMPOR**

# FIBERGLASS COMPOSITE HANGAR STRUCTURES

We offer wide possibilities in the development of hangar structures, which are characterised by corrosion resistance, long service life, easy installation and low maintenance costs.



<b>Span:</b>	up to 16 m
<b>Standard pole spacing:</b>	X m
<b>Height:</b>	up to 9 m



**COMPOR**

# FIBERGLASS COMPOSITE FOUNDATION SYSTEMS

Light weight

Thermally and electrically

non-conductive

Resistant to corrosion

Durable in aggressive



environments

Impact resistant




Dimensional stability

Long service life

Fast installation all  
year round



A house foundation system that allows the construction of buildings in difficult conditions: soft soil, clay, mountainous terrain, etc.

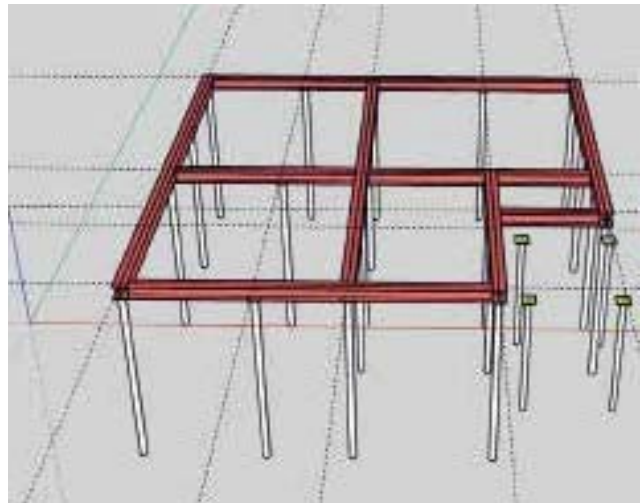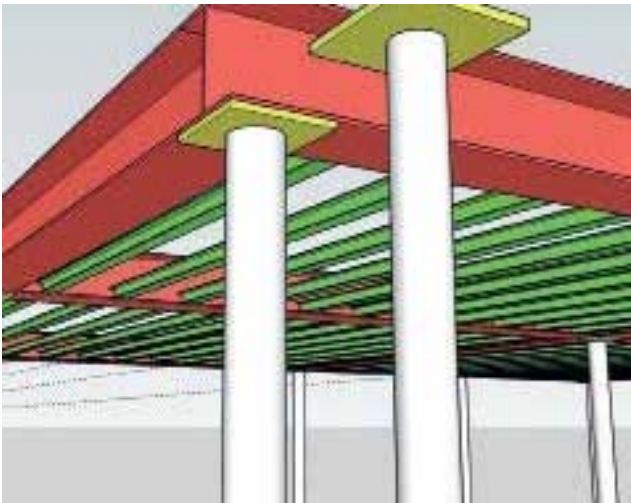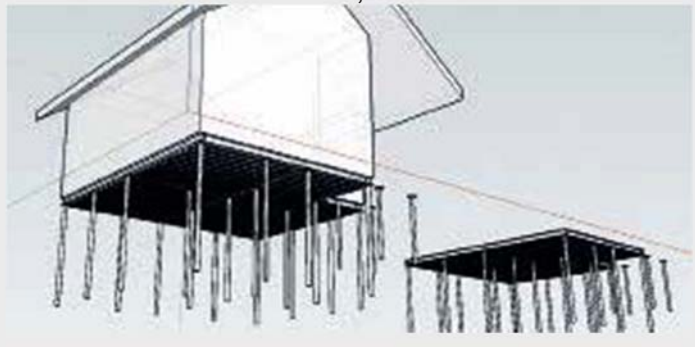

Fiberglass composite can be combined with a concrete slab used as a floor foundation for a house.





**COMPOR**

# FIBERGLASS COMPOSITE MODULAR HOUSES

We offer modular houses made of composite materials. Supporting structure – fiberglass composite profiles (wide flange beams, U-beams, squares). Panels (thickness of 120 and 170 mm) are highly efficient, energy-efficient structural insulated panels based on natural magnesite, filled with a special filling, the panels provide an excellent coefficient of thermal insulation and high resistance to fire, fungi and pest infestation.

This system is used for the construction of residential and commercial building structures.

These buildings are more energy efficient, use fewer natural resources and generate less waste, energy consumption and pollution during the construction process and throughout the entire life of the building





**COMPOR**

# FIBERGLASS COMPOSITE REFERENCES



Carnikava Bridge



Ship service bridge, each section of 24 m



Footbridge (frame, grids), 72 m



Service bridge in the port



Pedestrian bridge (pedestrian section and railing)



Floating modular house





**COMPOR**

# FIBERGLASS COMPOSITE REFERENCES



Construction of the Dendrājijs railway station



Traverses



Pedestrian crossing with non-slip coating



Ramp structures



Service platforms in a fish farm



Wastewater treatment plant stairs and platform



**COMPOR**

# FIBERGLASS COMPOSITE REFERENCES



Support beam in roof structures



Construction of a hangar structure



Hangar – warehouse structure



Technical bridge structure



Roof guardrail



Noise barriers





**COMPOR**

# FIBERGLASS COMPOSITE REFERENCES



Vertical stairs



Liepāja Bridge, staircase structure



Balticovo, cable rack system



Solar cell structure, meadow park



Terrace structure



Lamellas for facades, Rimi Shopping Centre





**COMPOR**

# FIBERGLASS COMPOSITE REFERENCES

**BEFORE RECONSTRUCTION**



**AFTER RECONSTRUCTION**







# COMPOR

SIA "COMPOR" LLC, SALASPILS, LATVIA

+371 27822444, +371 29417038

info@compor.lv

www.compor.lv

