



COMPOR

Adjustable **WINDOW INSTALLATION SYSTEM**

(fastened behind the wall construction)

COMPOR LLC, SALASPILS, LATVIA

+371 27822444, +371 29417038

info@compor.lv

www.compor.eu



CONTENTS

Window Installation System and its Advantages	3
Structural Defects Arising from Design or Installation Errors	4
Pre-assembly of Brackets on the Window Sill	5
Angles Suitable for fixing Windows	6
Pre-assembly of Brackets on the Frame Casing and Head	7





COMPOR

WINDOW INSTALLATION SYSTEM AND ITS ADVANTAGES +

The installation system ensures the accurate positioning of window and door openings, and removal of all permanent and variable loads.

The system is adjustable in three planes, easily compensating for structural assembly tolerances. The mounting bracket size is up to 150 mm, and it can be positioned according to the optimal isothermal profile.

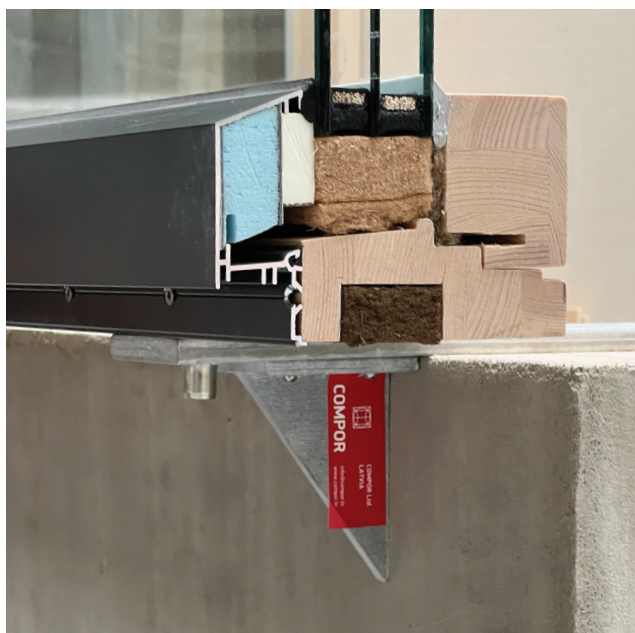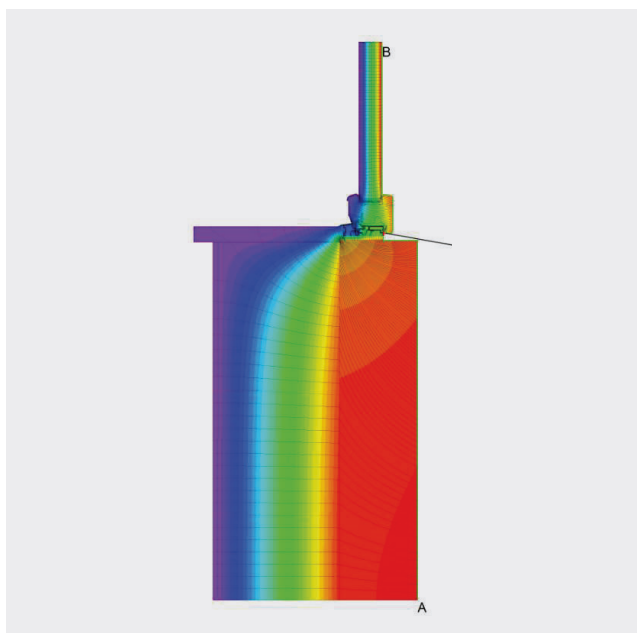

Advantageous Solution

- + Easily adjustable in three planes
- + Easily compensated for assembly tolerances
- + Easy, fast and safe installation even for large (and heavy) windows and doors
- + Individually customised dimensions
- + Increased load capacity without the use of expensive additional support members
- + Durable construction that eliminates problems during installation



Highest Quality

- + Calculated load capacity and safety statics (see data sheet)
- + Safe installation of windows is expected
- + Suitable for all workloads
- + A comprehensive system supplied by one manufacturer
- + Easy and safe installation according to RAL Regulations



Structural Physics

- + Material with low temperature resistance
- + The compaction process is not hindered
- + Enough space for insulation and sealing material



COMPOR

STRUCTURAL DEFECTS ARISING FROM DESIGN OR INSTALLATION ERRORS



Condensation problems?

When the warm air cools down too quickly inside the window, condensation forms.
Proper window placement calculations avoid this.




Mould is harmful to your health!

Mould indicates design (incorrectly calculated isothermal profile) or installation errors.



DETERMINING THE FRAME FIXING POSITION

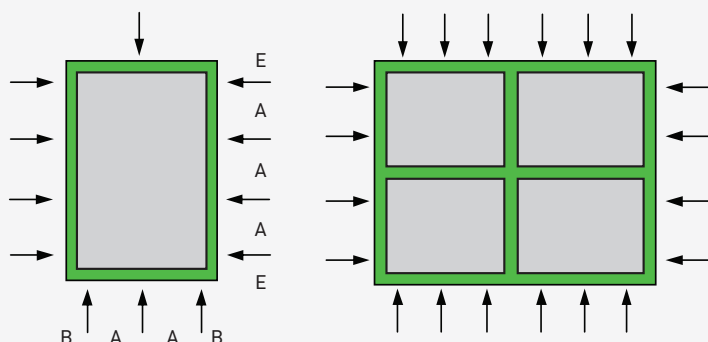

A Mounting Bracket Spacing

- aluminum windows: max. 800 mm
- wooden windows: max. 800 mm
- PVC windows: max. 700 mm

B Outside Corner Gap


50 - 70 mm from the outside corner of the window frame

E Inside Corner Gap

Distance from the inside corner of the window frame to the vertical and horizontal bars of the window, B A A B
100 - 150 mm

TOLERANCE

Minimum distance
Frame opening


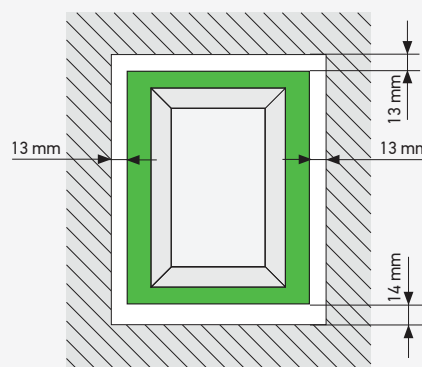


Maximum distance /
gap width 25 mm




PRE-ASSEMBLY OF BRACKETS ON THE WINDOW SILL (pre-installed without window)

Structure:
Sand-lime Bricks, Concrete

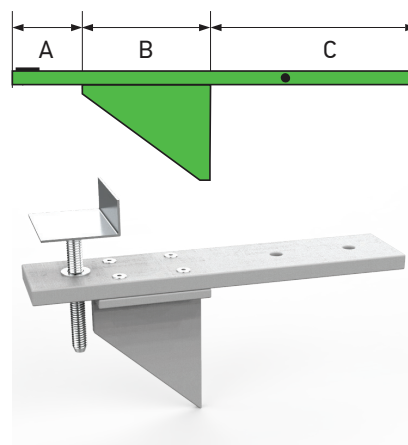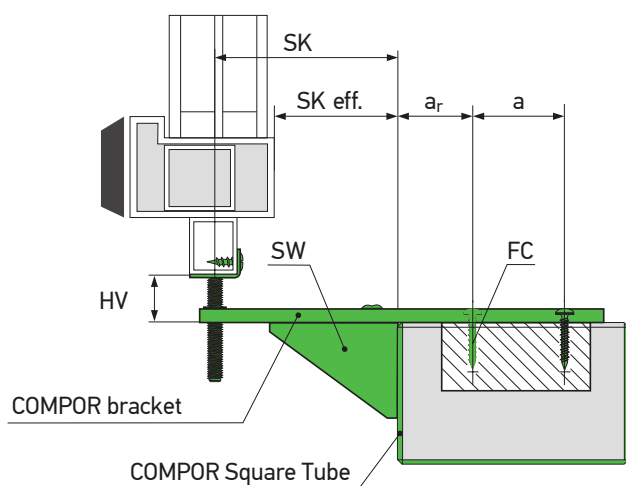

All brackets with width 51 mm

A	B	C	D	Model
70	60	150	10	70s
100	60	150	10	100s
120	150	150	10	120s

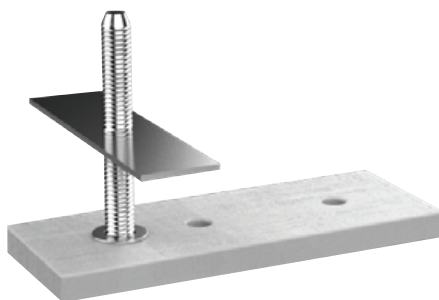

Length	Width	Tickness	Model
140	51	10	140 S
190	51	10	190 S
250	51	10	250 S




COMPOR

ANGLES


SUITABLE FOR FIXING WINDOWS
(pre-installed without window)

Structure:
Lorem ipsum

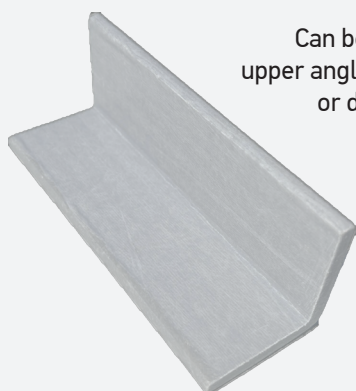

Can be used as side angles,
upper angles, and lower window
or door mounting angles.

Structure:
Lorem ipsum

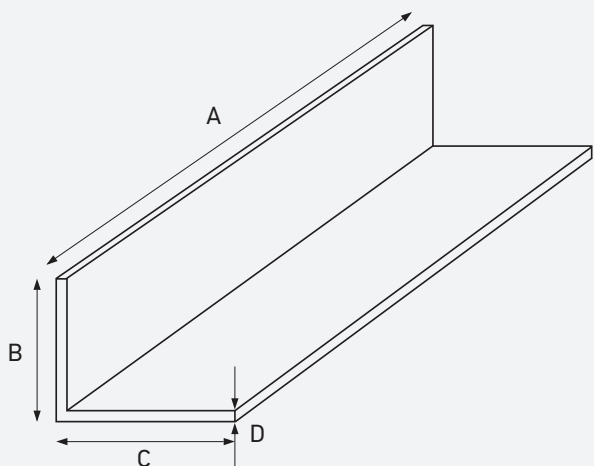

Dimensions


All dimensions are customizable!

A	B	C	D	Model
51	60	100	10	60/100 S
51	60	145	10	60/145 S
51	80	145	10	80/145 S

**COMPOR**

PRE-ASSEMBLY OF BRACKETS ON THE FRAME CASING AND HEAD (after window manufacturing or on site)

Structure: **Perforated Masonry Wall,
Sand-lime Bricks, Concrete**

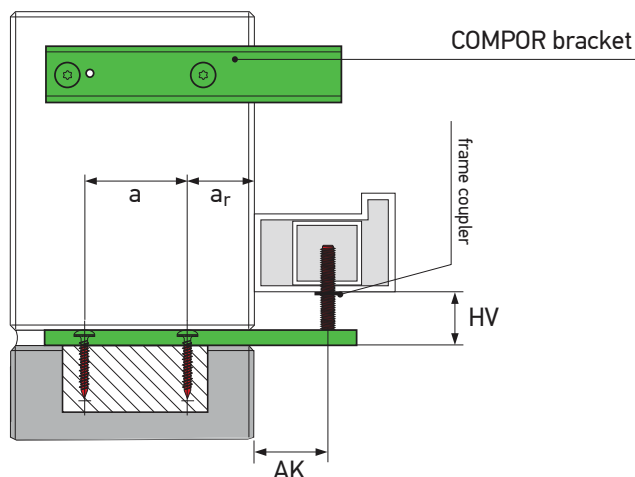

Dimensions

AK max. bracket (relative to the average frame profile)

AK useful console (depending on profile width)

HV height adjustment, max. 30 mm

a distance between centres, min. 25 mm

a_r distance between edges, min. 30 mm

AW seat angle, for brackets above 80 mm

ALW seat angle, for perforated masonry structure

ALW height-adjustable angle

ALW height adjustment plate

Load capacity, N (plate thickness 10 mm)

b (mm) \ AK (mm)	70	80	90	100	110	120	130	140	150
40	2857	2500	2222	2000	1818	1667	1538	1429	1333
50	3571	3125	2778	2500	2273	2083	1923	1786	1667
60	4286	3750	3333	3000	2727	2500	2308	2143	2000
70	5000	4375	3889	3500	3182	2917	2692	2500	2333
80	5714	5000	4444	4000	3636	3333	3077	2857	2667
90	6429	5625	5000	4500	4091	3750	3462	3214	3000

**COMPOR**


PRE-ASSEMBLY OF BRACKETS ON THE FRAME CASING AND HEAD (after window manufacturing or on site)

Load capacity, N (plate thickness 8 mm)

b (mm) \ AK (mm)	70	80	90	100	110	120	130	140	150
40	1829	1600	1422	1280	1164	1067	985	914	853
50	2286	2000	1778	1600	1455	1333	1231	1143	1067
60	2743	2400	2133	1920	1745	1600	1477	1371	1280
70	3200	2800	2489	2240	2036	1867	1723	1600	1493
80	3657	3200	2844	2560	2327	2133	1969	1829	1707
90	4114	3600	3200	2880	2618	2400	2215	2057	1920

Load capacity, N (plate thickness 6 mm)

b (mm) \ AK (mm)	70	80	90	100	110	120	130	140	150
40	1029	900	800	720	655	600	554	514	480
50	1286	1125	1000	900	818	750	692	643	600
60	1543	1350	1200	1080	982	900	831	771	720
70	1800	1575	1400	1260	1145	1050	969	900	840
80	2057	1800	1600	1440	1309	1200	1108	1029	960
90	2314	2025	1800	1620	1473	1350	1246	1157	1080

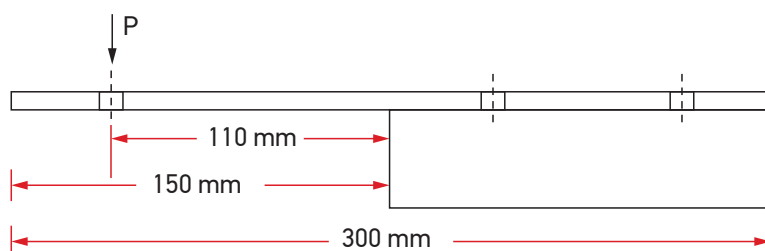


**COMPOR**

PRE-ASSEMBLY OF BRACKETS

SQUARE TUBES

**Square Tube for supporting windows,
doors, and thresholds**

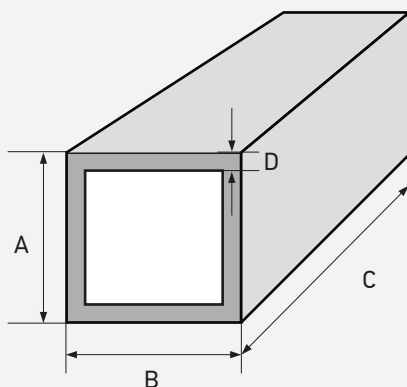


Dimensions

A	B	C	D	Model
25	25	2000/3000	3,20	25S
37	37	2000/3000	2,80	27S
44	44	2000/3000	2,80	44.28S
44	44	2000/3000	6,00	44.28S
51	51	2000/3000	3,20	51.32S
51	51	2000/3000	6,40	51.64S
60	60	2000/3000	4,50	60.45S
101.6	101.6	2000/3000	3,81	101.38S

**Square Tube fo
supporting windows**

Dimensions (mm)

A	B	C	D	E	F
60	60	120	4,5	88	201

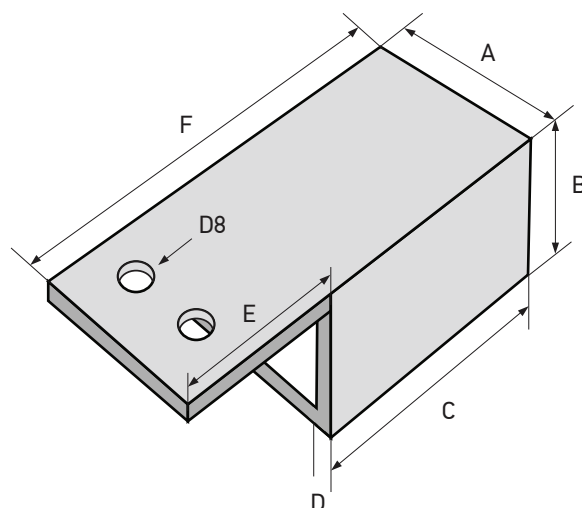



COMPOR

Representative:

**SIA GGF,
Straupes iela 3, Rīga, LV-1073**

☎ +371 29692428, +371 26353434

✉ diana@ggf.lv, jurijs@ggf.lv

Producer:

SIA COMPOR

🌐 www.compor.eu

